


Glazing design

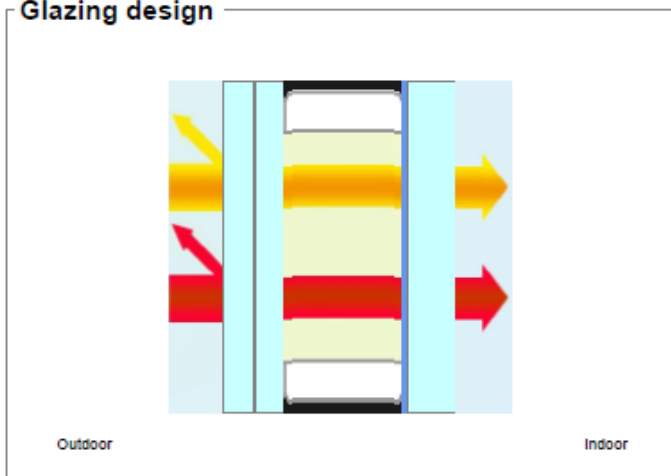

| | First glazing | Second glazing |
|--------------|----------------------|-------------------|
| Gas | | Argon 90% 12.00mm |
| Coating | | PLANISTAR LITE |
| First glass | PLANILUX 3.00mm | PLANILUX 5.00mm |
| Coating | | |
| Layer | PVB standard 0.38 mm | |
| Coating | | |
| Second glass | PLANILUX 3.00mm | |
| Coating | | |

Manufacturing sizes

Nominal thickness : **23.4 mm**
Weight : **27.9 kg/m²**

Luminous factors (EN410-2011)

Transmittance : **64 %**
Outdoor reflectance : **24 %**
Indoor reflectance : **26 %**

Colour rendering :

Ra : **96 Transmittance**
Ra : **94 Outdoor reflectance**

Energy factors (EN410-2011)

Transmittance : **37 %**
Outdoor reflectance : **33 %**
Indoor reflectance : **40 %**
Absorptance A1 : **21 %**
Absorptance A2 : **9 %**

Solar factors (EN410-2011)

g : **0.45**
Shading coefficient : **0.52**

Thermal transmission (EN673-2011) - 0° related to vertical position

Ug : **1.2 W/(m².K)**