


Glazing design

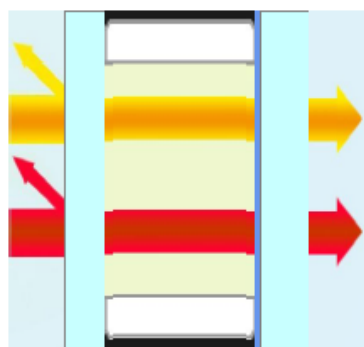

Outdoor

Indoor

	First glazing	Second glazing
Gas		Argon 90% 15.00mm
Coating		PLANISTAR LITE
First glass	PLANILUX 4.00mm	PLANILUX 5.00mm
Coating		
Layer		
Coating		
Second glass		
Coating		

Manufacturing sizes

Nominal thickness : **24.0 mm**
Weight : **22.5 kg/m²**

Luminous factors (EN410-2011)

Transmittance : **65 %**
Outdoor reflectance : **24 %**
Indoor reflectance : **26 %**

Colour rendering :

Ra : **96 Transmittance**
Ra : **95 Outdoor reflectance**

Energy factors (EN410-2011)

Transmittance : **39 %**
Outdoor reflectance : **40 %**
Indoor reflectance : **40 %**
Absorptance A1 : **11 %**
Absorptance A2 : **10 %**

Solar factors (EN410-2011)

g : **0.49**
Shading coefficient : **0.56**

Thermal transmission (EN673-2011) - 0° related to vertical position

Ug : **1.0 W/(m².K)**