


## Glazing design

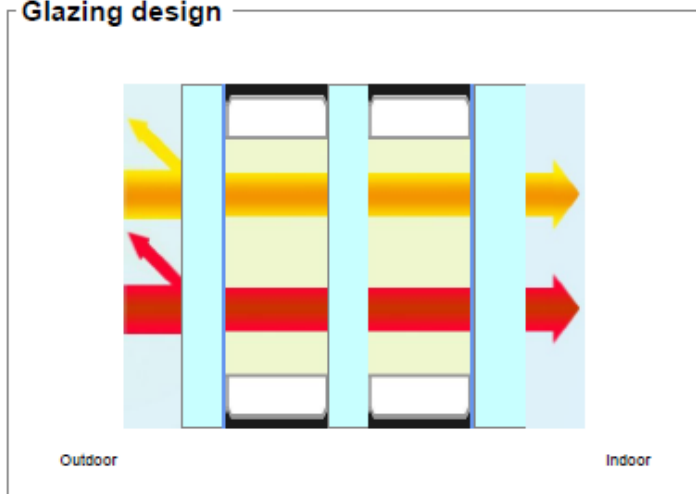

	First glazing	Second glazing	Third glazing
Gas		Argon 90% 10.00mm	Argon 90% 10.00mm
Coating			PLANISTAR LITE
First glass	PLANILUX 4.00mm	PLANILUX 4.00mm	PLANILUX 5.00mm
Coating	PLANITHERM ULTRA N		
Layer			
Coating			
Second glass			
Coating			

## Manufacturing sizes

Nominal thickness : **33.0 mm**  
Weight : **32.5 kg/m<sup>2</sup>**

## Luminous factors (EN410-2011)

Transmittance : **58 %**  
Outdoor reflectance : **25 %**  
Indoor reflectance : **28 %**

## Colour rendering :

Ra : **95** **Transmittance**  
Ra : **94** **Outdoor reflectance**

## Energy factors (EN410-2011)

Transmittance : **32 %**  
Outdoor reflectance : **38 %**  
Indoor reflectance : **42 %**  
Absorptance A1 : **17 %**  
Absorptance A2 : **6 %**  
Absorptance A3 : **7 %**

## Solar factors (EN410-2011)

g : **0.41**  
Shading coefficient : **0.48**

## Thermal transmission (EN673-2011) - - 0° related to vertical position

Ug : **0.8 W/(m<sup>2</sup>.K)**